



***T1 SERIES***



***T2 SERIES***



# **Ultimate**

***2007 PRODUCT LINE-UP***



## T1 SPEAKERS

	<b>T1-420</b>	<b>T1-520</b>	<b>T1-620</b>	<b>T1-690</b>	<b>T1-50C</b>	<b>T1-60C</b>
Type:	2-Way	2-Way	2-Way	3-Way	Components	Components
Size:	4"	5.25"	6.5"	6" x 9"	5.25"	6.5"
	10cm	13cm	16.5cm	15cm x 20cm	13cm	16.5cm
Power:	80w	120w	160w	240w	120w	160w
Impedance:	4 ohm	4 ohm	4 ohm	4 ohm	4 ohm	4 ohm
Surround:	Butyl rubber	Butyl rubber	Butyl rubber	Butyl rubber	Butyl rubber	Butyl rubber
Cone:	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Tweeter:	Mylar	Mylar	Mylar	Mylar	Mylar	Mylar
Frequency Response:	130hz - 20khz	110hz - 20khz	82hz - 20khz	65hz - 20khz	60hz - 20khz	50hz - 20khz
Sensitivity:	87db	88db	88db	89db	88db	88db

## T1 SUBWOOFER

	<b>T1-120</b>
Type:	Subwoofer
Size:	12"
	31cm
Power:	600w
Impedance:	4 ohm
Surround:	Butyl rubber
Cone:	IMPP
Frequency Response:	27hz-600hz
Sensitivity:	89db



## T1 AMPLIFIERS

	<b>T1-200</b>	<b>T1-400</b>
Maximum Power		
•4 ohms	100 x 2	100 x 4
•2 ohms	160 x 2	160 x 4
Bridged Power		
•4 ohms	120 x 1	140 x 2
THD	0.06%	0.06%
Signal to Noise Ratio	90db	90db
Frequency Response	20 - 20K Hz	20 - 20K Hz
Speaker Impedance (Min)	2 ohms	2 ohms
Damping Factor	250 @ 4 ohm	250 @ 4 ohm
Input Sensitivity	200mV - 2V	200mV - 2V
Dimensions	9 1/2" x 9 1/2" x 2"	15 3/8" x 9 1/2" x 2"
	24 x 24 x 5cm	39 x 24 x 5cm
Fuse Rating	25A	2x 30A





## T2 HEAD UNITS & OVERHEAD VIDEO

### CD100

- Flipdown Detachable Front Panel
- MP3, CD-R/RW Playback with Anti-Shock
- LED Display
- Encoder Volume Control
- Electronic Preset EQ
- 4x25w
- Auto-Load Cd Mechanism
- Fm/Am Tuner - 30 Station Presets with Auto-Memory
- Auxiliary Input - Front Panel
- Rear RCA Outputs
- Clock



### CD200

- Flipdown Detachable Front Panel
- MP3, CD-R/RW, WMA ESP - Electronic Shock Protection Playback with Anti-Shock
- USB/SD Reader
- LED Display - Colour
- Encoder Volume Control
- Electronic Preset EQ
- 4x40w
- Auto-Load Cd Mechanism
- Fm/Am Tuner - 30 Station Presets with Auto-Memory
- Triple RCA Outputs - Front, Rear, Subwoofer (no level control)
- Auxiliary Input - Rear Panel
- Clock
- Wireless Remote Control



### AFD92W

- Flip-Down Monitor with DVD Player
- 16:9 LCD Panel - 4:3 aspect ratio playback option
- Digital Panel Technology - for clear picture with no interference
- Compatible with DVD/VCD/CD/MP3/CD-R/JPEG formats
- Anti-Shock Buffer Memory - during playback
- FM Modulator - 87.9, 88.1, and 88.3 MHz
- IR Audio Transmission - for wireless headphones
- Auto-Switching A/V Input - perfect for gaming systems
- A/V Output - connect to other monitors
- Compatible with NTSC/PAL Systems - auto detection
- Selectable LED Dome Light
- Off-Axis Viewing - up to 135 degrees
- Full-Function Wireless Remote Control
- 2 wireless headphones included





## T2 SPEAKERS

	<b>T2-3521</b>	<b>T2-4021</b>	<b>T2-5021</b>	<b>T2-6021</b>	<b>T2-6521</b>
Type:	2-Way	2-Way	2-Way	2-Way	2-Way
Size:	3.5"	4"	5.25"	6"	6.5"
	9cm	10cm	13cm	16.5cm	16.5cm
Power Max:	120w	160w	200w	240w	240w
Impedance:	4 ohm	4 ohm	4 ohm	4 ohm	4 ohm
Surround:	Santoprene	Santoprene	Santoprene	Santoprene	Santoprene
Cone:	IMPP	IMPP	IMPP	IMPP	IMPP
Tweeter:	PEI	PEI	PEI	PEI	PEI
Frequency Response:	80hz - 22khz	60hz - 22khz	50hz - 22khz	40hz - 22khz	40hz - 22khz
Sensitivity:	87db	88db	89db	90db	90db



## T2 SPEAKERS & COMPONENTS

	<b>T2-4621</b>	<b>T2-6821</b>	<b>T2-6931</b>	<b>T2-511C</b>	<b>T2-611C</b>
Type:	2-Way	2-Way	3-Way	Components	Components
Size:	4" x 6"	6" x 8"	6" x 9"	5.25"	6.5"
	10cm x 15cm	15cm x 20cm	15cm x 23cm	13cm	16.5cm
Power Max:	160w	240w	320w	200w	240w
Impedance:	4 ohm	4 ohm	4 ohm	4 ohm	4 ohm
Surround:	Santoprene	Santoprene	Santoprene	Santoprene	Santoprene
Cone:	IMPP	IMPP	IMPP	IMPP	IMPP
Tweeter:	PEI	PEI	PEI	PEI	PEI
Frequency Response:	50hz - 22khz	30hz - 22khz	30hz - 22khz	50hz - 22khz	40hz - 22khz
Sensitivity:	89db	91db	91db	89db	90db



## T2 SUBWOOFER

	<b>T2-SW10</b>	<b>T2-SW12</b>
Type:	Subwoofer	Subwoofer
Size:	10"	12"
	25cm	31cm
Power Max:	450w	600w
Impedance:	4 ohm	4 ohm
Surround:	Rubber	Rubber
Cone:	Aluminum	Aluminum
Frequency Response:	25 - 600 Hz	25hz - 600khz
Sensitivity:	88dB	89db




## T2 LOADED BASS TUBE

	<b>T2-1200T</b>
Impedance	4 ohms
Sensitivity	92dB
Frequency Response	28 - 600 Hz
Power Handling (RMS)	200 watts
Power Handling (Max)	600 watts
Voice Coil Diameter	1.5"
	38.6mm
Length	27"
	69cm
Height	14"
	36cm
Enclosure Volume	1.6 cubic feet
	45 liters
Port Frequency	40 Hz

### FEATURES

- Aluminum cone subwoofer
- Butyl rubber, ultra linear surround
- Four layer KSV voice coil
- Strontium magnet structure
- Vented bumped back plate
- Internally braced, hard-pressed tube enclosure
- Fully adjustable, nylon mounting strap

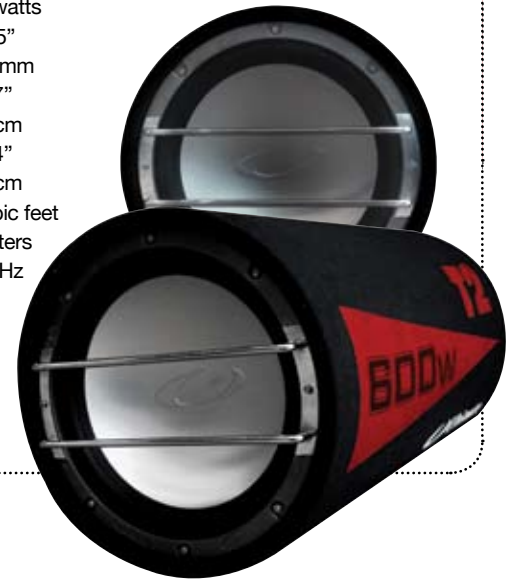



## T2 AMPLIFIERS

	<b>T2-F50</b>	<b>T2-T50</b>	<b>T2-M200</b>	<b>T2-M1000D</b>
Maximum Power				
4 ohms:	140 x 4	140 x 2	350 x 1	750 x 1
2 ohms:	200 x 4	200 x 2	470 x 1	1000 x 1
Bridged Power				
4 ohms:	160 x 2	160 x 1	---	---
THD:	0.04%	0.05%	0.12%	0.12%
Signal to Noise Ratio:	90db	91db	97db	97db
Frequency Response:	10-110K Hz	10-110K Hz	10-200Hz	10-200Hz
Speaker Impedance (Min):	2 ohms	2 ohms	2 ohms	4 ohms
Damping Factor:	200 @ 4 ohms	220 @ 4 ohms	180 @ 4 ohms	180 @ 4 ohms
Input Sensitivity:	300mV - 8V	300mV - 8V	300mV - 8V	300mV - 8V
Dimensions:	8" x 15 1/16" x 2"	8" x 9 5/16" x 2"	8" x 12" x 2"	8" x 12" x 2"
	203mm x 383mm x 50mm	203mm x 233mm x 50mm	203mm x 305mm x 50mm	404mm x 203mm x 49.1mm
Fuse Rating:	20A x 2	20A	35A	30A x 3

### FEATURES

- Class AB / D Circuitry
- MOSFET Power Supply
- Illuminated "Ultimate" logo
- Overload Protection Indicator
- Gold Plated RCA Connections
- Low Level Input - variable up to 8 volts
- High Level Input - variable up to 10 volts
- Gold Plated Terminal Block for Power Input & Speaker Output
- Variable HP/LP Crossover Control from 40 to 400Hz
- Bass boost - switched 12dB at 45 Hz
- Protection Circuitry against Short, Overload and Thermal

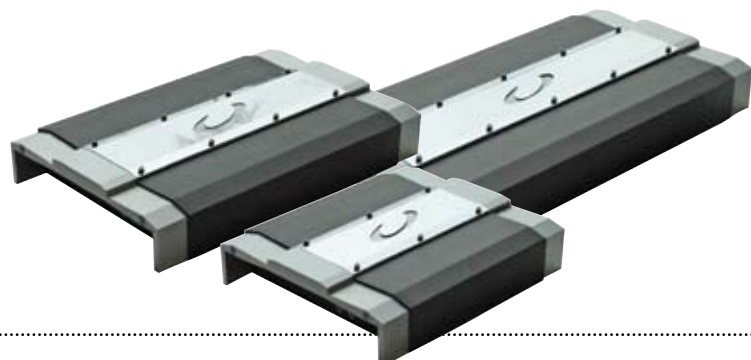

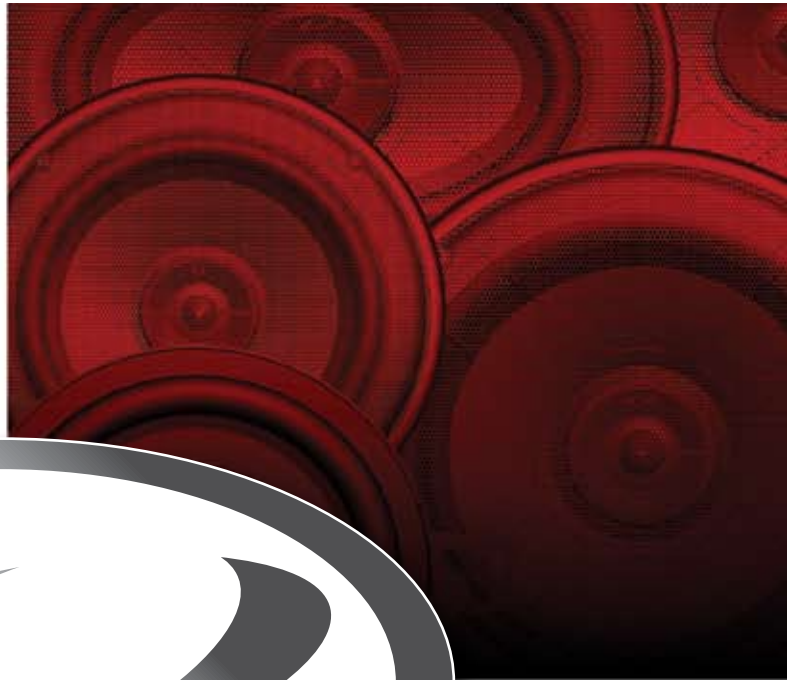

# **Erikson**

## CONSUMER

Toll Free Order Number: 1.800.567.3275

Toll Free Fax Number: 1.866.450.5507

Home Office · Siège Social  
Montreal

21000 Trans-Canada  
Baie D'Urfé · Québec  
H9X 4B7 · Canada

[www.ultimate-sound.com](http://www.ultimate-sound.com)

### ***Corporate Profile***

Founded in 1972, Jam Industries Ltd. began operating in Montreal under the trade name of Erikson Music, and through the 1970's, the world has witnessed the rapid growth of this Quebec-based company. More than thirty years and expansion into five commercial divisions later, Erikson Consumer has quickly established itself as a major presence in the 12-volt aftermarket industry thanks to brands like Bassworx and Ultimate Sound.

Following a consistent upward curve, Jam Industries' growth and diversification continues to strengthen its position in the marketplace, providing a resourceful, reliable, and innovative world distribution network throughout Canada, the United States, Europe and Asia.